




Tip Of The WEEK

www.dchome1.com

Sub Slab Depressurization Exterior Routing

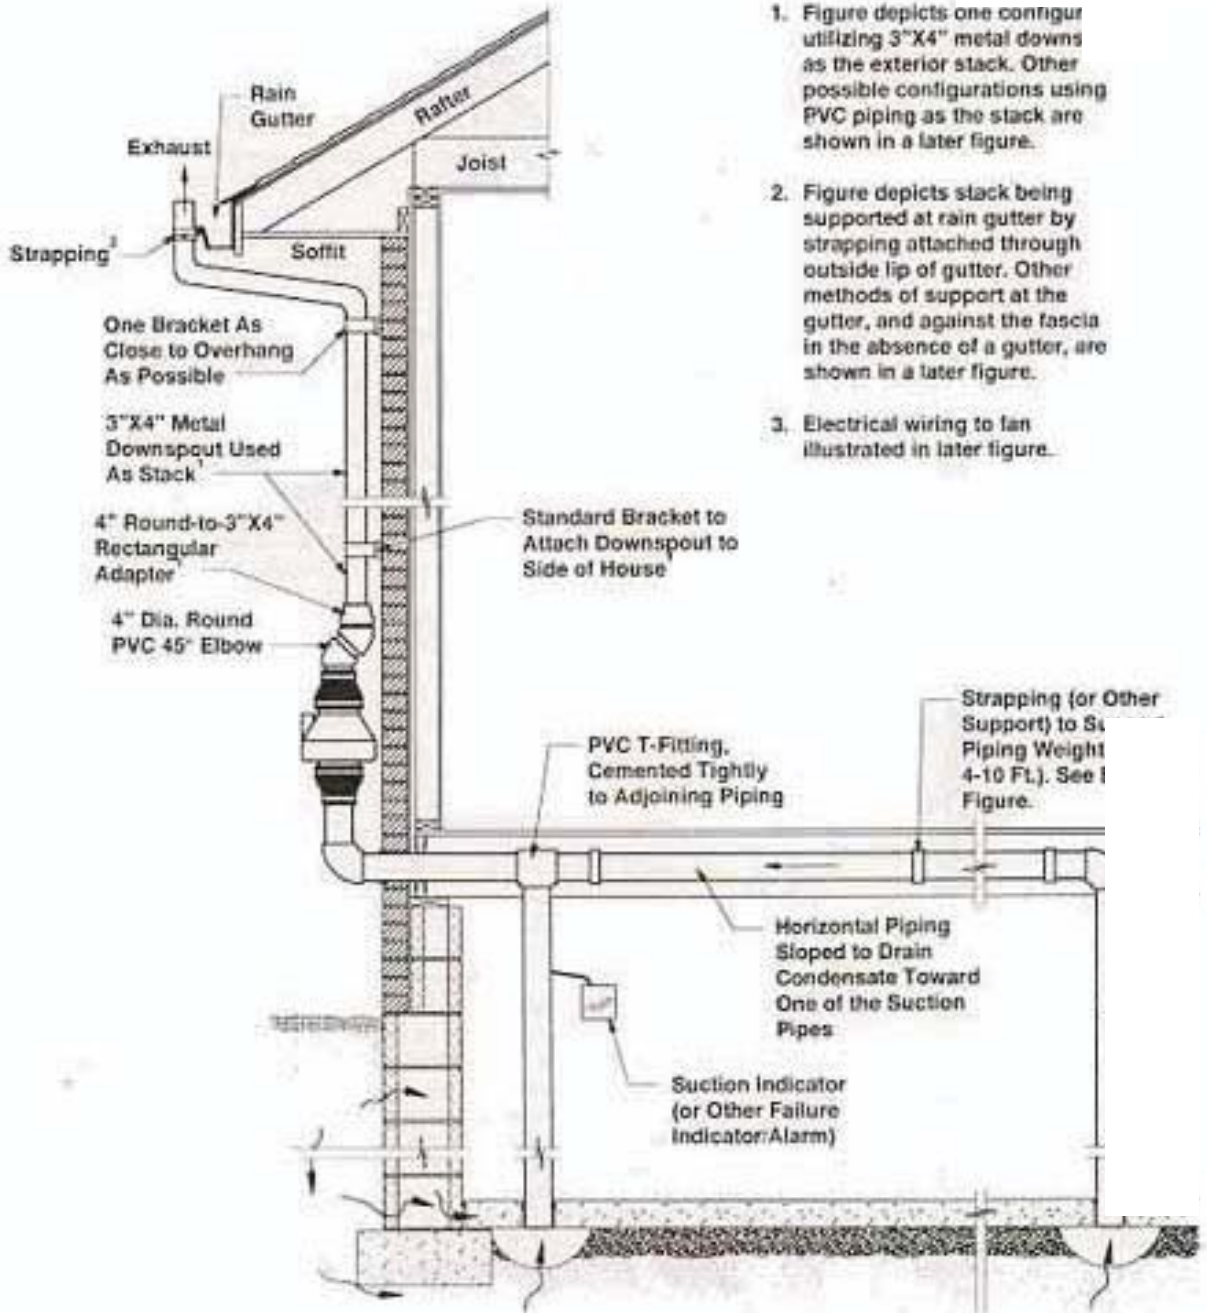

Notes:

1. Figure depicts one configur utilizing 3\"X4\" metal downs as the exterior stack. Other possible configurations using PVC piping as the stack are shown in a later figure.
2. Figure depicts stack being supported at rain gutter by strapping attached through outside lip of gutter. Other methods of support at the gutter, and against the fascia in the absence of a gutter, are shown in a later figure.
3. Electrical wiring to fan illustrated in later figure.

NEWEST TESTS AVAILABLE

